




R1170030 Motorcycle Cable Acc Brake And Clutch Cables For TVS ROCKZ 125

Our Product Introduction

Basic Information

- Place of Origin: Guangdong, China
- Brand Name: WAY-C
- Model Number: TVS ROCKZ 125
- Minimum Order Quantity: 200 pieces
- Price: \$2.00/pieces 12-99 pieces
- Packaging Details: NYLON+CARTON
- Delivery Time: 30-45days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 20000 Piece/Pieces per Month

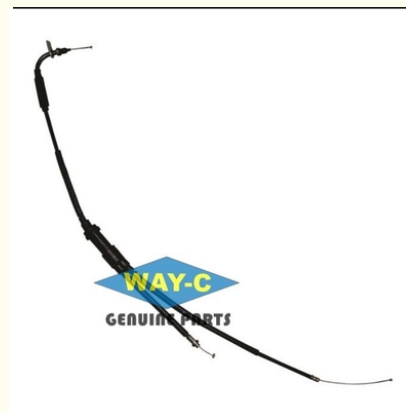

Product Specification

- Model: TVS ROCKZ 125
- Product Name: Motorcycle Cable
- MOQ: 200PCS
- Material: Copper
- Quality: High Qaulity
- Shipping: Sea Transport.Air Transport Air Express
- Port: NANSHA/HUANGPU, GUANGZHOU
- Parts NO: R1170030
- Highlight: R1170030 Motorcycle Cable,
Acc Motorcycle Cable,
Motorcycle Brake And Clutch Cables



for more products please visit us on waycmoto.com

Product Description

R1170030 Motorcycle Cable Clutch Brake Cable Acc Speed Cable for TVS ROCKZ 125

Products Description

Product name	Motorcycle Cable
Model	TVS ROCKZ 125
Materials	Copper
Size	OEM
Packing	Box
Shipping	Sea/Air
Place of origin	Guangzhou,China



The design of the harness selects the type of motorcycle cable, focusing on the environment and function of the motorcycle cable. For example, the ambient temperature around the engine is high, and there are many corrosive gases and liquids. Therefore, it is necessary to use high-temperature, oil-resistant, vibration-resistant, and friction-resistant wires; The motorcycle cable on the trunk lid should maintain its elasticity at low temperature, so the cold elastic wire should be selected to ensure its normal operation; The wires on the automatic transmission must be resistant to high temperature and hydraulic oil, and its temperature stability must be good; Shielded wires should be used for weak signal sensors, such as knock sensors, crankshaft position sensors, ABS wheel speed sensors, etc.; The bending resistance of the inner line of the door is required.

The motorcycle cable commonly used in automotive wiring harnesses usually use multi-strand stranded copper wires, and the insulating skin is PVC insulating material. The wire used in the wire harness should have the characteristics of temperature resistance, oil resistance, wear resistance, waterproof, anti-corrosion, oxidation resistance, flame retardant and so on.

The motorcycle cable is the main body of the motorcycle circuit, and there is no motorcycle circuit without the motorcycle cable. At present, whether it is a high-end or an economical or ordinary motorcycle, the form of motorcycle cable braiding is basically the same, which is composed of wires, plug-ins and external wrapping protectors. This article introduces the order of motorcycle cable design.



PACKING & SHIPPING

GUANGZHOU WAY-C TRADING CO.,LTD.



5-7 working days
WWW.TNT.COM



5-7 working days
WWW.EMS.COM.CN



5-7 working days
WWW.DHL.COM



5-7 working days
WWW.UPS.COM



5-7 working days
WWW.FEDEX.COM



Why Choose Us

OUR ADVANTAGES

GUANGZHOU WAY-C TRADING CO.,LTD.

Why choose us?

- ◆ 1. High quality: Using high quality material and establishing a strict quality control system, assigning specific persons in charge of each part of production, from raw material purchase to assembly.
- ◆ 2. Professional models for motorcycle parts and three wheeler parts , we have one group to focus on the new models parts , so welcome to OEM and ODM orders
- ◆ 3. Fast dispatch: Most of the products are in stock. Quality below 100pcs can be delivered within 15 days.
- ◆ 4. Small order accepted: Low MOQ accepted. 50pcs are available.





GUANGZHOU WAY-C TRADING CO.,LTD



+86 18561893286



522509400@qq.com



waycmoto.com

NO.356 Baiyun Motorcycle Parts Market, Zengcha Road, Baiyun District,Guangzhou